

# UNIVERSIDAD DE CONCEPCIÓN



## CENTRO DE INVESTIGACIÓN EN INGENIERÍA MATEMÁTICA (CI<sup>2</sup>MA)



**Estimation of hydraulic parameters under unsaturated flow  
conditions in heap leaching**

EMILIO CARIAGA, RUBÉN MARTÍNEZ,  
MAURICIO SEPÚLVEDA

PREPRINT 2012-14

### SERIE DE PRE-PUBLICACIONES



# Estimation of Hydraulic Parameters under Unsaturated Flow Conditions in Heap Leaching

Emilio Cariaga\*

*Departamento de Ciencias Matemáticas y Físicas, Universidad Católica de Temuco,  
Casilla 15-D, Temuco, Chile.*

Rubén Martínez

*Departamento de Ingeniería Matemática, Universidad de la Frontera, Casilla 54-D,  
Temuco, Chile.*

Mauricio Sepúlveda

*CP<sup>2</sup>MA and Departamento de Ingeniería Matemática, Universidad de Concepción,  
Casilla 160-C, Concepción, Chile.*

---

## Abstract

The mathematical modeling of the unsaturated flow problem requires the simultaneous resolution of two problems: the Richards equation and the estimation of the hydraulic parameters involved in hydraulic conductivity and in the retention curve. Various techniques have been applied to both problems in a wide range of situations. In this article, a novel implementation of the processing techniques involved in copper heap leaching is presented. Specifically, the impact of the used numerical method and the selection of the parametric family are evaluated. From a methodological point of view, a

---

\*Corresponding author

*Email addresses:* `ecariaga@uct.cl` (Emilio Cariaga), `r.martinez08@ufromail.cl` (Rubén Martínez), `mauricio@ing-mat.udec.cl` (Mauricio Sepúlveda)

*URL:* `http://www.uct.cl/` (Emilio Cariaga), `http://www.ufro.cl/` (Rubén Martínez), `http://www.ing-mat.udec.cl/` (Mauricio Sepúlveda)

global algorithm is proposed that integrates the solutions of both problems. Finally, our computational experiments are compared with previous experimental results from the Chilean copper mining industry and related works, and we obtain better results.

*Keywords:* parameter estimation, heap leaching, Richards equation.

---

## 1. Introduction

Heap leaching is a widely used extraction method for low-grade minerals as well as copper, gold, silver, and uranium. Copper minerals are primarily categorized as either copper sulphides or oxides. During heap leaching, sulfuric acid (the leaching agent) is continuously applied to the top of the ore pile. The bioleaching process is suitable for copper recovery of the more stable sulphide minerals from copper ores.

The construction of the heap is preceded by a crushing and agglomeration process that determines the hydrodynamic properties of the stack: mechanical stability, particle size, porosity, and permeability. The chemical properties are mainly determined by the composition of the ore itself [7].

From a macroscopic point of view, the mathematical modeling of flow and transport in porous media requires the resolution of two main problems: the Differential Equation (DP), and the Parameters Estimation (PE). For both problems, there are several techniques that have been applied in a wide range of situations.

The HeapSim code [6, 14] is a part of the bioleaching model, in which the estimation of different types of parameters is performed by varying one parameter at a time and adjusting regression curves by the least squares

method. The process of estimation in this program is primarily empirical and relies heavily on the expertise of the user. For completeness, we mention [13] where a parameter estimation under saturated flow conditions was performed, and [3, 2, 4] for a brief discussion of the hydraulic parameters for two phase flow in copper heap leaching.

In [10], the fluid flow problem was modeled under unsaturated conditions in copper column leaching, the Richards equation was solved with a finite difference scheme, and the parameters were estimated with the Simplex Search method. Additionally, in [10] the van Genuchten family was applied, with a constant irrigation rate. In [16] the fluid flow problem was also modeled under unsaturated conditions in a copper heap and in column leaching, the Richards equation was solved with a finite difference scheme, and the parameters were estimated by means of fitting regression curves. In [16], a combination of the van Genuchten model along with the Brooks-Corey model was considered, but no adequate justification for this choice was presented. Moreover, in [16] the experimental data outflow from a semi-industrial heap leaching was considered. The simulation was based on a one dimensional mathematical model. Unfortunately, the observed outflow was compared only with the average simulated flow and did not consider daily fluctuations in outflow or the variable irrigation rates. In [12], the fluid flow problem was also modeled under unsaturated conditions in a copper leach pad. The Richards equation and the parameters estimation problems were solved with Hydrus 2D software (cf. [15]). The simulated outflow in [12] considers the variable irrigation rate and daily fluctuations of the outflow, achieving a proper fit to the experimental data. To the best of our knowledge,

[10, 12] and [16] are the only works that have been conducted in this area. This paper provides a novel application of DP and PE problems to copper heap leaching under unsaturated flow conditions. In the DP problem, the Richards equation is solved with the same numerical scheme applied in [10]. The PE problem is solved with the Levenberg-Marquardt algorithm (cf. [9]) from the MATLAB optimization toolbox, [17].

The main objective of this work is to provide a global algorithm that considers the solution of both problems in a way that is easy to implement by the mining industry. This article describes an advantageous method for the estimation of hydraulic parameters. We present a global algorithm that integrates the numerical solution of the Richards equation with the optimization method and provides a numerical error estimation.

We have organized this article into six sections. Section 2 presents the model problem. In Section 3, the numerical solution of the Richards equation is presented. In Section 4, the Global Algorithm of estimation is developed, which combines the optimization and differential problems. Section 5 reports five computational experiments, and Section 6 presents the main conclusions.

## 2. Model Problem

Figure 1 represents a leaching column of length  $H > 0$  that is wet with a liquid irrigation rate  $R(t) \geq 0$ . At the base of the column, the experimental outflow  $q_{o_j}$  is measured at specific time intervals  $t_j$ ,  $j \in \{1, \dots, N\}$ .

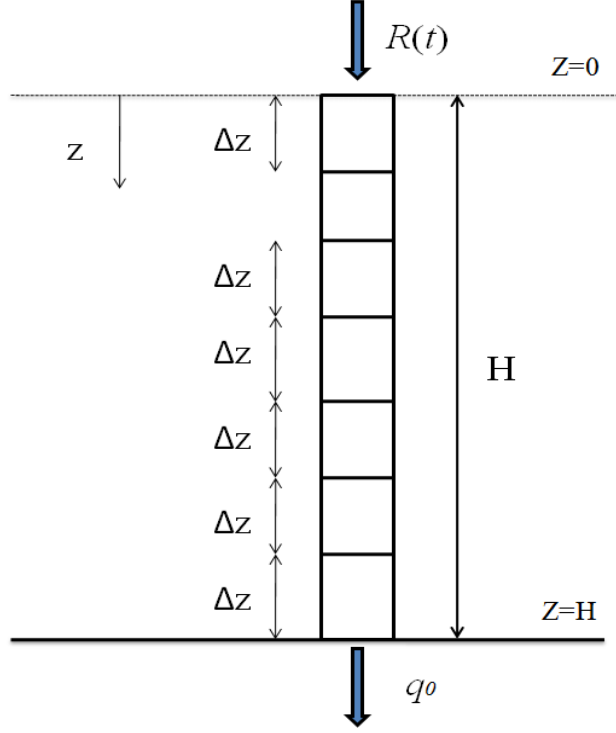


Figure 1. Mathematical domain.

If  $\theta = \theta(z, t)$  is the moisture content in the column at the height  $z \in [0, H]$  (the spatial coordinate  $z$  is positive in the downward direction) at time  $t \in [0, T]$ , then according to the mass conservation law, and Darcy's law, the Richards equation (cf. [1] for detailed derivation of this equation) becomes,

$$\frac{\partial \theta}{\partial t} = \frac{\partial}{\partial z} \left( D(\theta) \frac{\partial \theta}{\partial z} \right) - \frac{\partial}{\partial z} K(\theta) \quad (1)$$

with the initial and boundary conditions,

$$\theta = \theta_{initial} \text{ in } t = 0, \quad z > 0 \quad (2)$$

$$-D(\theta) \frac{\partial \theta}{\partial z} + K(\theta) = R(t) \text{ in } z = 0, \quad t > 0 \quad (3)$$

$$\frac{\partial \theta}{\partial z} = 0 \text{ in } z = H, t > 0 \quad (4)$$

where the hydraulic conductivity  $K(\theta)$ , the diffusivity  $D(\theta) = K(\theta)/\frac{d\theta}{dh}$ , and the retention curve  $h(\theta)$  are all non-linear functions,  $\theta_{initial}$  is the initial volumetric water content, and  $h$  is the soil water potential.

The differential problem (DP) consists of obtaining an approximation of  $\theta$  on the rectangle  $[0, H] \times [0, T]$ , from equation (1), under conditions (2), (3) and (4).

**Remark 1.** With respect to the functions  $K(\theta)$  and  $h(\theta)$ , in this work the following two parametric families will be considered:

1. **Family VG.** This parametric family corresponds to van Genuchten which is defined as [8]:

$$K(\theta) := K_s \sqrt{S(\theta)} \left( 1 - \left( 1 - S^{\frac{1}{m}}(\theta) \right)^m \right)^2 \quad (5)$$

$$S(\theta) := \frac{\theta(h) - \theta_r}{\theta_s - \theta_r} = \frac{1}{(1 + (\alpha|h|)^n)^m}, \quad (6)$$

where  $m = 1 - \frac{1}{n}$ ,  $n > 1$ ,  $K_s$  is the saturated hydraulic conductivity of porous media,  $\theta_r$  is the residual volumetric content of liquid, and  $\theta_s$  is the volumetric content of liquid saturation.

2. **Family VGM.** This parametric family corresponds to a modification of van Genuchten [8], which was applied in [4, 16]. Specifically,

$$K(\theta) = K_s S^\delta(\theta) \quad (7)$$

$$S(\theta) = \frac{\theta(h) - \theta_r}{\theta_s - \theta_r} = \frac{1}{(1 + (\alpha|h|)^n)^m}, \quad (8)$$



where  $m = 1 - \frac{2}{n}$ ,  $\delta = 3 + \frac{2}{nm}$ ,  $K_s$  is the saturated hydraulic conductivity of porous media,  $\theta_r$  is the residual volumetric content of liquid, and  $\theta_s$  is the volumetric content of liquid saturation.

### 3. Numerical Solution of the Richards Equation

The numerical solution of equation (1) is based on the finite difference method, specifically, the Crank-Nicholson modified method (cf. [5]). The election of this method follows [10] to enable a better comparison with our computational experiments.

Let  $[0, H]$  be the spatial domain and  $[0, T]$  the temporal domain. Let  $Nz$  and  $Nt$  be the number of subintervals for  $[0, H]$  and  $[0, T]$ , respectively. We define  $\Delta z := H/Nz$ ,  $\Delta t := T/Nt$ , and  $\theta_i^j$  is an approximation of  $\theta(i\Delta z, j\Delta t)$ , with  $i \in \{0, \dots, Nz\}$  and  $j \in \{0, \dots, Nt\}$ . Therefore, the discretization of (1), for  $i \in \{0, \dots, Nz\}$  and  $j \in \{0, \dots, Nt - 1\}$ , is given by:

$$\frac{\theta_i^{j+1} - \theta_i^j}{\Delta t} = \frac{1}{2} \cdot (E_i^{j+1} + E_i^j) - \frac{1}{2} \cdot (F_i^{j+1} + F_i^j), \quad (9)$$

where,

$$\begin{aligned} E_i^{j+1} &:= \frac{D_{ff} \cdot (\theta_{i+1}^{j+1} - \theta_i^{j+1}) - D_{bf} \cdot (\theta_i^{j+1} - \theta_{i-1}^{j+1})}{(\Delta z)^2} \\ E_i^j &:= \frac{D_f \cdot (\theta_{i+1}^j - \theta_i^j) - D_b \cdot (\theta_i^j - \theta_{i-1}^j)}{(\Delta z)^2} \\ F_i^m &:= \frac{K_{i+1}^m - K_{i-1}^m}{2\Delta z}; m = j, j+1, \end{aligned}$$

with  $D_{ff} := \frac{D_{i+1}^{j+1} + D_i^{j+1}}{2}$ ,  $D_{bf} := \frac{D_i^{j+1} + D_{i-1}^{j+1}}{2}$ ,  $D_f := \frac{D_{i+1}^j + D_i^j}{2}$ ,  $D_b := \frac{D_i^j + D_{i-1}^j}{2}$ ,  $D_i^j := D(\theta_i^j)$  and  $K_i^j := K(\theta_i^j)$ . With respect to the boundary conditions, the discrete version of (3), that is, for  $i = 0$ , is given by

$$-D_0^j \frac{(\theta_0^j - \theta_{-1}^j)}{\Delta z} + K_0^j = R^j, \quad \forall j = 0, \dots, Nt. \quad (10)$$

On the other hand, the discrete version of (4), that is, for  $i = Nz$ , is given by

$$\frac{\theta_{Nz+1}^j - \theta_{Nz}^j}{\Delta z} = 0, \quad \forall j = 0, \dots, Nt. \quad (11)$$

The discretization in space is at most first order as the diffusion coefficients are not constant. Furthermore, the discretization in time is also first-order (semi-implicit Euler method). For this reason the first-order discretization (11) is sufficient.

The matrix form of the nonlinear system (9), for  $m \in \{0, \dots, Nt - 1\}$  and  $i \in \{0, \dots, Nz\}$ , is given by

$$A(\theta^{m+1})\theta^{m+1} = b(\theta^m) + c(\theta^{m+1}), \quad (12)$$

where  $\theta^{m+1} = (\theta_i^{m+1})_{(Nz+1) \times 1}$  and the entries of  $A(\theta^{m+1})$ ,  $b(\theta^m)$  and  $c(\theta^{m+1})$  are defined as follows. The matrix  $A = A(\theta^{m+1})_{(Nz+1) \times (Nz+1)}$  is given by

$$A = \begin{bmatrix} 1 + w_1(D_{ff} + D_{bf}) & -w_1 D_{ff} & 0 & \dots & \dots \\ -w_1 D_{bf} & 1 + w_1(D_{ff} + D_{bf}) & -w_1 D_{ff} & 0 & \dots \\ \dots & \dots & \dots & \dots & \dots \\ \dots & 0 & -w_1 D_{bf} & 1 + w_1(D_{ff} + D_{bf}) & -w_1 D_{ff} \\ \dots & \dots & 0 & -w_1 D_{bf} & 1 + w_1(D_{ff} + D_{bf}) \end{bmatrix}$$

where  $w_1 := \frac{\Delta t}{2(\Delta z)^2}$ . The entries of  $b = b(\theta^m)_{(Nz+1) \times 1}$ , for  $i \in \{0, \dots, Nz\}$ , are given by

$$b_{i+1} = \theta_i^j + w_1[D_f(\theta_{i+1}^j - \theta_i^j) - D_b(\theta_i^j - \theta_{i-1}^j)] - w_2(K_{i+1}^j - K_{i-1}^j),$$

where  $w_2 := \frac{\Delta t}{4\Delta z}$ , and the entries of  $c = c(\theta^{m+1})_{(Nz+1) \times 1}$ , for  $i \in \{1, \dots, Nz-1\}$  are

$$c_{i+1} = -w_2(K_{i+1}^{j+1} - K_{i-1}^{j+1}),$$

and for  $i = 0$

$$c_1 = -w_2(K_1^{j+1} - K_{-1}^{j+1}) + w_1 D_{bf} \theta_{-1}^{j+1},$$

where  $\theta_{-1}^{j+1}$  is computed from the boundary condition (10), and for  $i = Nz$

$$c_{Nz+1} = -w_2(K_{Nz+1}^{j+1} - K_{Nz-1}^{j+1}) + w_1 D_{ff} \theta_{Nz+1}^{j+1},$$

where  $\theta_{Nz+1}^{j+1}$  is computed from the boundary condition (11).

**Remark 2.** The system in (12) is implicit in time and will be solved by a corrector-predictor method. Specifically, in this work we consider two versions for this method:

1. **Version CP1.** This version corresponds to the method applied in [10].

In the  $j^{th}$ -iteration, the system is solved as

$$A(\theta^j) \theta_{aux} = b(\theta^j) + c(\theta^j), \quad (13)$$

for  $\theta_{aux}$  and then  $\theta^{j+1}$  is computed from

$$A(\theta_{aux}) \theta^{j+1} = b(\theta^j) + c(\theta_{aux}). \quad (14)$$

2. **Version CP2.** This version corresponds to the method applied in [5].

For  $j \in \{0, \dots, Nz - 1\}$ , the vector  $\theta_p$  is computed from

$$A(\theta^j) \theta_p = b(\theta^j) + c(\theta^j) \quad (15)$$

where  $\theta_p$  is a prediction of  $\theta^{j+1}$ . Next,  $\theta_c$  which is a correction of  $\theta_p$ , is calculated from

$$A(\theta_p) \theta_c = b(\theta^j) + c(\theta_p), \quad (16)$$

which is a correction that is acceptable as an estimation of  $\theta^{j+1}$  when

$$\|A(\theta_c)\theta_c - (b(\theta^j) + c(\theta_c))\|_2 < \epsilon, \quad (17)$$

where  $\epsilon$  is a user's value; otherwise,  $\theta_p = \theta_c$ .  $\theta_c$  is computed again from (16) until (17) is satisfied. In this case,

$$\theta^{j+1} = \theta_c.$$

Note that the application of CP1 and CP2 is based in the resolution of a linear tridiagonal system (12) which is diagonal dominant. This system was solved with the Thomas algorithm [5], which is based on a LU factorization when is applied to a tridiagonal matrix.

#### 4. Global Algorithm of Parameter Estimation

In this work the parameter vector considered is  $(\alpha, n)$  (cf. Remark 1). Comparing the experimental outflow  $q_{o_j}$ ,  $j = 1, \dots, N$  with the numerical solutions of the DP:  $q(\theta; (\alpha, n)) = -D(\theta; (\alpha, n))\frac{\partial \theta}{\partial z} + K(\theta; (\alpha, n))$  (maintaining the same notation for discrete and continuous solutions), the objective function

$$\Omega(\alpha, n) = \sum_{j=1}^N \left( q_{o_j} - \hat{q}(\hat{\theta}_j(\alpha, n)) \right)^2, \quad (18)$$

is obtained, where  $\hat{q}(\hat{\theta}_j((\alpha, n)))$  is the numerical outflow estimated in  $t_j$ , with  $j = 1, \dots, N$ .

The minimization of the function (18) is based on the Levenberg-Marquardt algorithm, which will be applied using the MATLAB function *lsqnonlin* (cf. [17]), which is based on [11]. A complete analysis of the convergence and a detailed discussion of the computational implementation of the algorithm is

presented in [9] and was also discussed in [11]. Here, the primary application of the Levenberg-Marquardt algorithm is curve fitting using the least squares method.

The input for the optimization algorithm of (18) are:  $q_o$  (vector of experimental flow),  $(\alpha_0, n_0)$  (vector of initial values),  $T$  (length of temporal interval of simulation for DP),  $H$  (height of leaching column), and  $Nt$  and  $Nz$  (the size of partitions in time and space, respectively). This data is applied to *lsqnonlin* and the output is the vector  $(\alpha_{opt}, n_{opt})$ , where  $\Omega(\alpha, n)$  is minimum.

Figure 2 describes the computational structure of the routine and its subroutines by showing the order in which the calculations are made and the order in which the functions are used, where the *qfunction* is a MATLAB function that computes the vector  $r$  and its components

$$r(\theta_j(\alpha, n)) = q_{o_j} - \hat{q}(\hat{\theta}_j(\alpha, n)), \quad j = 1, \dots, N.$$

After the incorporation of the specified data by the user in Section 5, the *lsqnonlin* function is invoked, which in turn invokes the *qfunction* (m-function created by the user), which in turn invokes the subroutine Solve **DP**. This process is repeated as many times as seems necessary by the function *lsqnonlin*.

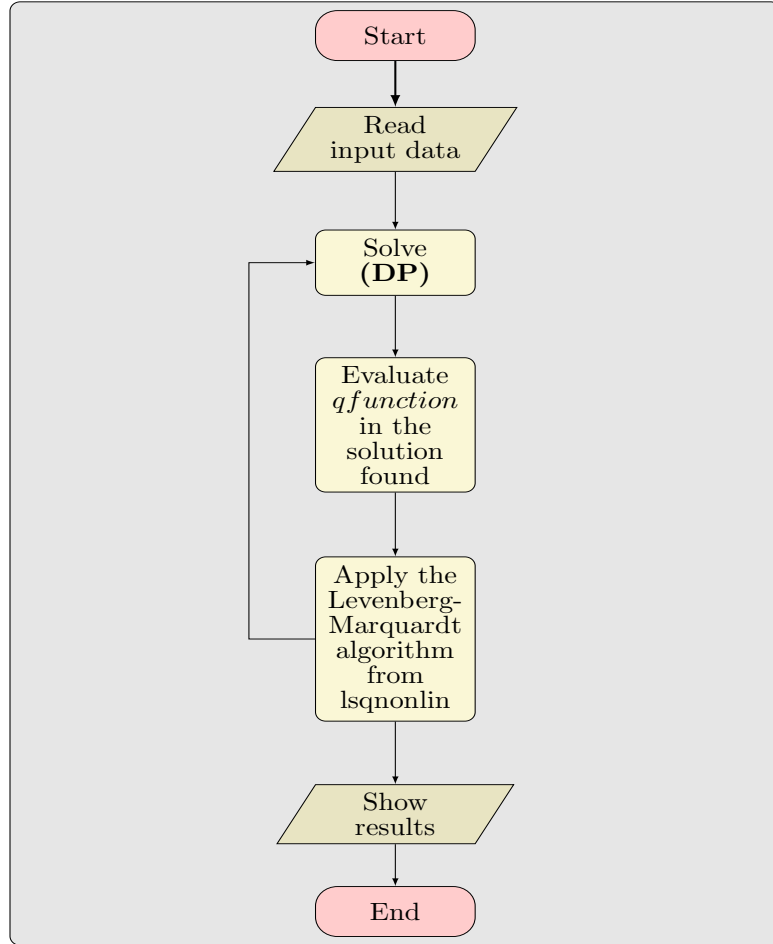


Figure 2. Flowchart of the Global Estimation Algorithm.

The subroutine **Solve (DP)**, which is detailed in Figure 3, takes the data from the *qfunction* and solves the Richards equation. Specifically, applies de Predictor-Corrector method and the Thomas's algorithm (cf. Section 3 and Remark 2).

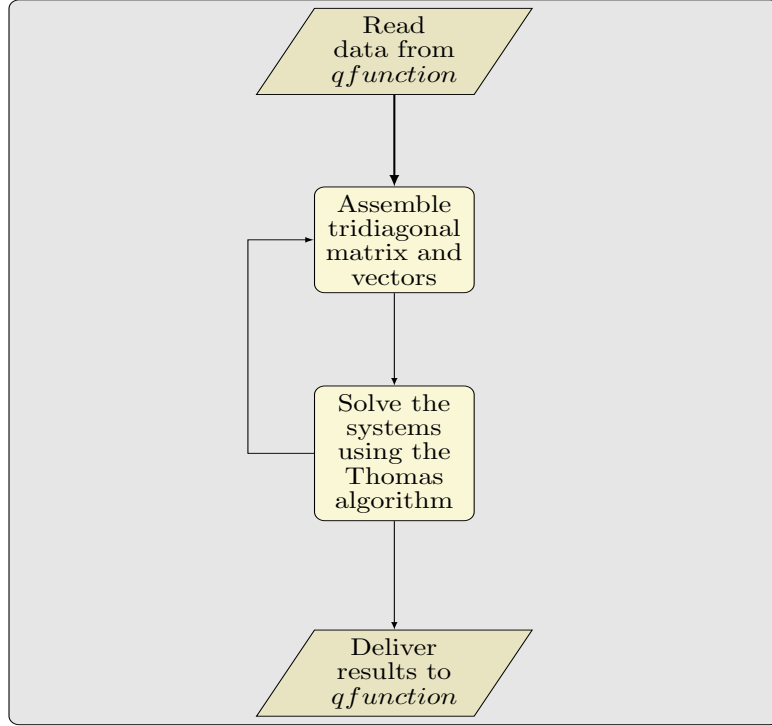


Figure 3. Flowchart for Solve (DP)

## 5. Computational Experiments

The copper heap in Tranque Barahona, Chile that was researched in articles [12, 16] was also investigated for this article. The heap is 550 *cm* high, 220 *cm* wide, and has a base of length 500 *cm*, with lateral slopes 1:1. Drip irrigation was conducted on a surface of 308 *m*<sup>2</sup>. Additionally, a programmed variable irrigation was applied to the heap for 44 days. For more details see Table 1 (where VG is used as acronym for van Genuchten).

In experiments 1, 2, 3 and 4, (see sections 5.1, 5.2, 5.3, and 5.4, respectively) the parametric family VG defined by (5) and (6) was considered. In experiment 5 (see section 5.5), the parametric family VGM defined by (7)

Parameter	Symbol	Value
Total Time	T	44 [day]
Height	H	550 [cm]
Initial Moisture	$\theta_{initial}$	0.14 [ $cm^3/cm^3$ ]
Saturated Moisture	$\theta_s$	0.33 [ $cm^3/cm^3$ ]
Residual Moisture	$\theta_r$	0 [ $cm^3/cm^3$ ]
Saturated Hydraulic Conductivity	$K_s$	170 [cm/day]
VG Parameter	$\alpha$	0.035 [1/cm]
VG Parameter	$n$	2.267
Size of Time Step	$\Delta t$	1/24 [day]
Size of Space Step	$\Delta z$	2.5 [cm]

Table 1: Simulation Parameters

and (8) was considered (cf. Remark 1).

### 5.1. Experiment 1

In this experiment only the DP problem was solved, that is, the Richards equation, following the parameters outlined in Table 1. The values of the van Genuchten parameters were  $(\alpha_1, n_1) = (0.035, 2.267)$ . The parametric family utilized was VGM: (7)-(8), and the corrector-predictor method was CP1: (13)-(14). In Experiment 1, the numerical value of the relative residual norm is

$$100 \cdot \|q_o - \hat{q}(\hat{\theta}(\alpha_1, n_1))\|_2 / \|q_o\|_2 = 47.39\%,$$

where  $\|q_o\|_2 = 133.4280[m^3/day]$ .

Figure 4 contains the evolution of influent, effluent and modeled flows.



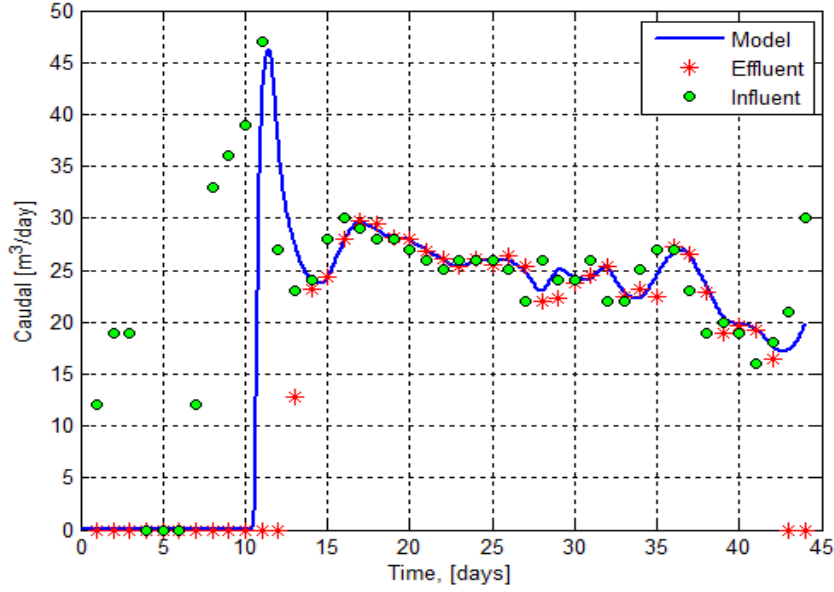


Figure 4. Measured and Modeled Outflow

In Figure 4, we can see that the model is better adjusted to the observed outflow from the 14 day simulation, and this situation is maintained until day 42.

### 5.2. Experiment 2

In this experiment, we performed the Global Estimation Algorithm, as described in Figure 2. The data in Table 1 was used except for the VG parameters vector, which was changed by the initial parameter vector  $(\alpha_0, n_0) = (0.035, 2.315)$ . The parametric family utilized was VGM: (7)-(8), and the corrector-predictor method was CP1: (13)-(14). The results are summarized in Table 2, where  $\alpha_{opt2}$  and  $n_{opt2}$  are the optimal values obtained with the Levenberg-Marquardt algorithm. The observed influent and effluent versus the estimated outflow with the optimal parameters is similar to Experiment 1 (to see Figura 4). In Table 2, one iteration includes the evaluation of the

Parameter	Value
$\alpha_0$	0.035 [1/cm]
$n_0$	2.315
$\alpha_{opt2}$	0.049 [1/cm]
$n_{opt2}$	2.230
$\ q_o - \hat{q}(\hat{\theta}(\alpha_{opt2}, n_{opt2}))\ _2$	55.3768 [m <sup>3</sup> /day]
N iterations	15
Mean time by iteration	890 [s]

Table 2: Optimal Values for  $\alpha$  and  $n$

$qfunction$  by *lsqnonlin* and the solution of the DP. This process takes approximately 890 [s] . In Experiment 1, the numerical value of the relative residual norm is

$$100 \cdot \|q_o - \hat{q}(\hat{\theta}(\alpha_{opt2}, n_{opt2}))\|_2 / \|q_o\|_2 = 41.50\%.$$

### 5.3. Experiment 3

This experiment is a continuation of Experiment 2. In Experiment 3, the impact of changing the size of the steps in space and time is evaluated. Four tests were performed with the same data in Table 1, with  $\alpha$ ,  $n$ ,  $\Delta t$  and  $\Delta z$  reported in Table 3. The data concerning the residual norms, the number of iterations, and the mean time elapsed are located in Table 4. In these four tests, the initial vector parameters were  $(\alpha_0, n_0) = (0.035, 2.315)$ .

The results of Experiment 3 show that the initial values  $\Delta z = 2.5[cm]$  and  $\Delta t = 1/24[day]$  are suitable, this is, are sufficiently small. The only impact observed after reducing the values of  $\Delta z$  and  $\Delta t$  was a reduction in the

relative residual norm and an increase in the mean time of calculation. In tests 1 to 4 the parameters estimated were  $\alpha_{opt3} = 0.04999999$  and  $n_{opt3} = 2.2300000$ , where only the first four decimal places are physically significant. Finally, note that the differences observed between 9 and 14 decimal places can be explained by the internal computer arithmetic.

Test	$\Delta t$	$\Delta z$	$(\alpha_{opt3}, n_{opt3})$
1	$\frac{1}{24}$ [day]	2.5 [cm]	(0.04999999823866, 2.23000002251736)
2	$\frac{1}{29}$ [day]	2.0 [cm]	(0.04999999999996, 2.23000000000012)
3	$\frac{1}{36}$ [day]	1.5 [cm]	(0.04999999780221, 2.23000004077647)
4	$\frac{1}{48}$ [day]	1.0 [cm]	(0.04999999738890, 2.23000004007278)

Table 3: Optimal Values

Test	Relative Residual Norm	Iterations	Mean Time
1	41.50%	15	890 [s]
2	40.59%	18	2326 [s]
3	40.27%	15	3590 [s]
4	40.02%	15	5229 [s]

Table 4: Residual norm, iterations, mean time

The observed influent and effluent versus the estimated outflow in test 1,2,3 and 4, is similar to Experiment 1 (to see Figure 4).

#### 5.4. Experiment 4

In this experiment the impact of corrector-predictor method (cf. Remark 2) is evaluated. The parametric family utilized was VGM: (7)-(8), and

the corrector-predictor method was CP2: (15)-(16). In Figure 5, the same comparison between the influent and effluent experimental flows, and the simulated outflow is made, but with the under improved predictor-corrector method (cf. Remark 2 and compare the Figures 4 and 5).

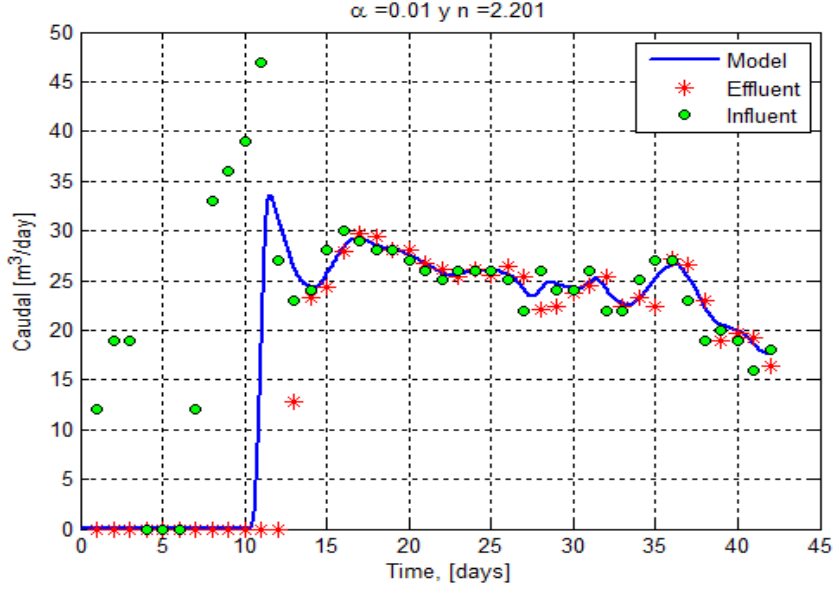


Figure 5. Outflow with improved predictor-corrector method.

The new optimal parameters vector is  $(\alpha_{opt4}, n_{opt4}) = (0.01, 2.201)$ .

In Experiment 4, the numerical value of the relative residual norm is

$$100 \cdot \|q_o - \hat{q}(\hat{\theta}(\alpha_{opt4}, n_{opt4}))\|_2 / \|q_o\|_2 = 29.01\%.$$

### 5.5. Experiment 5

Experiment 5 reports the results of two main modifications made to the previous results. The parametric family utilized was VG: (5)-(6), and the corrector-predictor method was CP2: (15)-(16). Under these new conditions, the optimal parameter vector was  $(\alpha_{opt5}, n_{opt5}) = (0.013, 1.306)$ . In

Experiment 5, the numerical value of the relative residual norm is

$$100 \cdot \|q_o - \hat{q}(\hat{\theta}(\alpha_{opt5}, n_{opt5}))\|_2 / \|q_o\|_2 = 3.49\%.$$

Figure 6 shows the experimental data and the estimated data. The improved conditions compared with the works [10, 12, 16]. In [12], the heap was divided into three layers (top, middle and bottom), and the estimation of the van Genuchten parameters,  $\alpha$  and  $n$ , were made for each of these layers. For the parameter  $\alpha$ , the values obtained were  $0.03023[1/cm]$ ,  $0.01368[1/cm]$ , and  $0.07060[1/cm]$ , respectively. For the parameter  $n$ , the values obtained were  $1.265[-]$ ,  $1.411[-]$  and  $1.200[-]$ , respectively. Therefore, our estimates of  $(\alpha_{opt5}, n_{opt5}) = (0.013, 1.306)$  correlate well with those obtained with the Hydrus Software 2D. However, the error of our fit is lower.

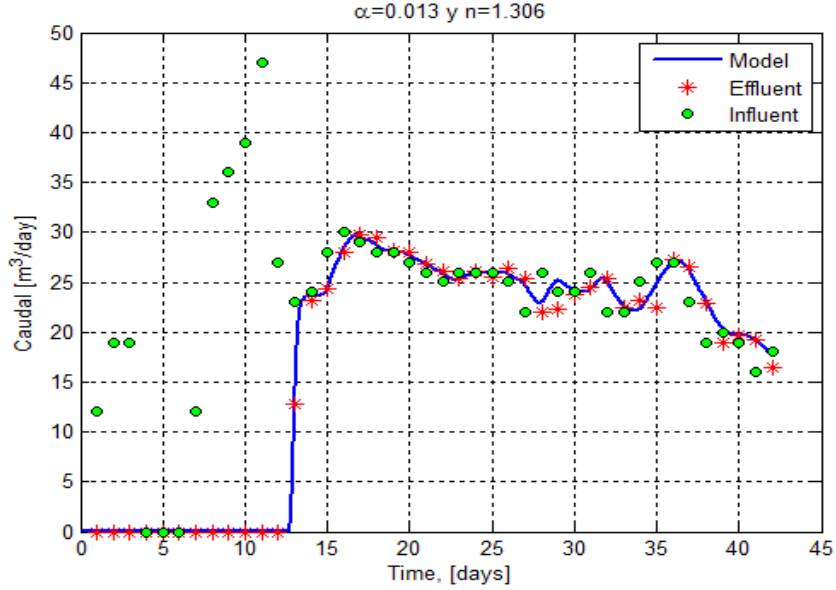


Figure 6. Outflow with improved method.

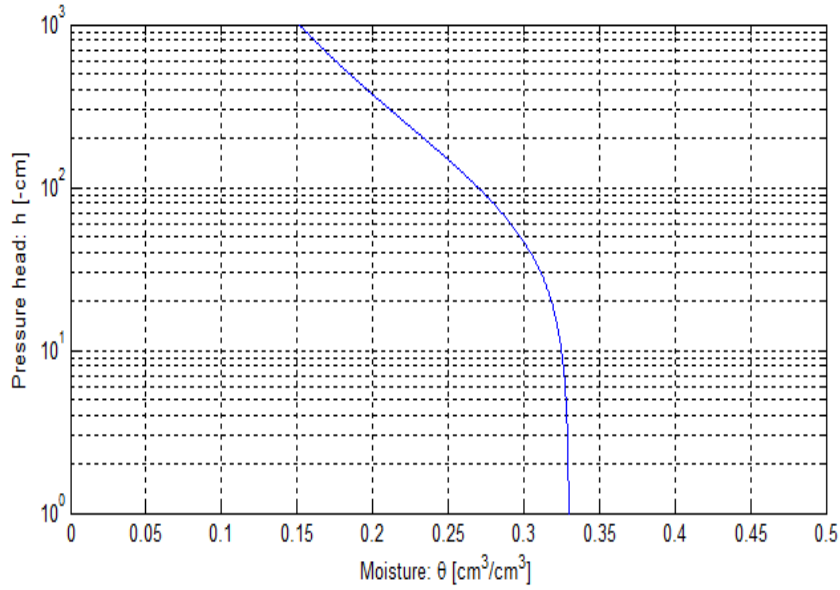


Figure 7. Retention Curve  $h(\theta)$ .

Finally, Figure 7 shows the Retention Curve (6) with the same data and under the same conditions as in Figure 6.

## 6. Conclusions

In this paper, the problem associated with the parametric estimation from the soil water retention curve and the hydraulic conductivity function, has been solved in the context of mathematical modeling of the fluid flow in copper heap leaching, under unsaturated conditions.

In relation to the numerical solution of the algebraic nonlinear system from the discretization of the Richards equation, we evaluated two cases: first, the corrector-predictor method in [10], and second, a better version of the same method. With respect to the parametric families, we evaluated two cases: a combination of the van Genuchten and Brooks-Corey models follow-

ing [4, 16], as well as the van Genuchten family following [10, 12]. The optimization problem was solved with the Levenberg-Marquardt algorithm taken from MATLAB. All simulations were compared with experimental data, so that our method would have less error associated with it in comparison with the methods of [2, 4, 10, 12, 16].

This article presents a detailed description of the estimation process and emphasizes the importance of carefully selecting the parametric family and the method employed in the numerical solution of the differential problem. The algorithm developed in this article may be useful in the pre-industrial stages of the design process of leach pads, especially in the experiments conducted in columns where an efficient and exact estimation of the hydrodynamic characteristics assists in the establishment of optimal extraction conditions on an industrial scale. This work is expected to impact the decision making process of metallurgical engineers. Indeed, when the outflow in a leaching pad is simulated, a significant percentage of unexplained variability in the model can be attributed to the methods of approach and/or optimization used.

Our main conclusion for the industrial practice is the need to use software in experimental leaching columns to evaluate: the best solution choice for the differential problem and different parametric families and, to achieve an optimum fit to the experimental data obtained in the pre-industrial stage.

We will continue to examine these methods through the repetition of these tests with different numerical methods, the evaluation of other parametric families, the analysis of changes in critical parameters, and through the evaluation of an the improved version of the optimization algorithm.

**ACKNOWLEDGMENTS:** EC acknowledges support by Fondecyt project 11100358. MS has been supported by Fondecyt project 1110540, and BASAL projects CMM, Universidad de Chile.

## References

- [1] J. Bear, Dynamics of fluids in porous media, Dover Publications, Inc. New York, first edition, 1988.
- [2] E. Cariaga, F. Concha, M. Sepúlveda, Flow through porous media with applications to heap leaching of copper ores, Chemical Engineering Journal 196 (2005) 2541–2554.
- [3] E. Cariaga, F. Concha, M. Sepúlveda, Simultaneous modeling of liquid and gaseous phases in heap leaching of copper production, in: J.M. Casas, J.M. Menacho (Eds.), Proceeding of the III International Copper Hydrometallurgy Workshop, pp. 301–315, 2005.
- [4] E. Cariaga, F. Concha, M. Sepúlveda, Convergence of a mfe-fv method for two phase-flow with applications to heap leaching of copper ores, Computer Methods in Applied Mechanics and Engineering 196 (2007) 2541–2554.
- [5] M. Davis, Numerical methods and modeling for Chemical Engineers, John Wiley & Son USA, second edition, 1990.
- [6] D. Dixon, J. Petersen, Modeling the dynamics of heap bioleaching for process improvement and innovation, in: T. Vargas (Ed.), Proceeding



- of the International Colloquium Hydrometallurgical on Processing of Copper Sulfides, pp. 13–45, 2004.
- [7] E. Domiég, Hidrometalurgia: Fundamentos, Procesos y Aplicaciones, first edition, 2001.
  - [8] T. van Genuchten, A closed-form equation for predicting the hydraulic conductivity of unsaturated soils, *Soil Sci. Soc. Am. J.* 44 (1980) 892–898.
  - [9] D. Marquardt, An algorithm for least-squares estimation of nonlinear parameters, *Journal of the Society for Industrial and Applied Mathematics* 11 (1963) 431–441.
  - [10] S. Mejía, Modelación y simulación de la visualización del transporte de fluido a través de pilas de lixiviación de minerales de cobre, Master’s thesis, Universidad de Chile, 2000.
  - [11] J. Moré, The levenberg-marquardt algorithm: implementation and theory, *Lecture Notes in Math.* 630 (1978) 105–116.
  - [12] J. Munhoz, C. Ortiz, Estudio experimental y modelación numérica de una pila de relave de cobre aglomerado, in: *Actas del XV Congreso Chileno de Ingeniería Hidráulica*, pp. 359–369, 2001.
  - [13] J. Munhoz, P. Rengifo, M. Vauclin, Acid leaching of copper in a saturated porous material: parameter identification and experimental validation of a two-dimensional transport model, *Journal of Contaminant Hydrology* 27 (1997) 1–24.

- [14] J. Petersen, H. Watling, D. Dixon, P. Franzmann, J. Plumb, J. Johnson, S. Harrison, G. Hansford, Progress on the development of comprehensive understanding and a model of copper heap bioleaching, in: J.M. Menacho, J.M. Casas (Eds.), Proceeding of the III International Copper Hydrometallurgy Workshop, The AMIRA P768 Project, pp. 333–342, 2005.
- [15] J. Simunek, M. Sejna, T. van Genuchten, The Hydrus-2D software package for simulating the two-dimensional movement of water, heat and multiple solutes in variably saturated media, Version 2.0, Technical Report, U.S. Salinity Laboratory, USDA, ARS, Riverside, California, 1999.
- [16] A. Suazo, Lixiviación ácida en pilas de relave aglomerado, Ph.D. thesis, Pontificia Universidad Católica de Chile, 2003.
- [17] P. Venkataraman, Applied optimization with MATLAB programing, Wiley, second edition, 2009.

# Centro de Investigación en Ingeniería Matemática (CI<sup>2</sup>MA)

## PRE-PUBLICACIONES 2012

- 2012-03 RAIMUND BÜRGER, STEFAN DIEHL, SEBASTIAN FARÅS, INGMAR NOPENS, ELENA TORFS: *A consistent modelling methodology for secondary settling tanks: A reliable numerical method*
- 2012-04 RAIMUND BÜRGER, STEFAN DIEHL, SEBASTIAN FARÅS, INGMAR NOPENS: *On reliable and unreliable numerical methods for the simulation of secondary settling tanks in wastewater treatment*
- 2012-05 MARGARETH ALVES, JAIME MUÑOZ-RIVERA, MAURICIO SEPÚLVEDA, OCTAVIO VERA, MARÍA ZEGARRA-GARAY: *The asymptotic behaviour of the linear transmission problem in viscoelasticity*
- 2012-06 SALIM MEDDAHI, DAVID MORA, RODOLFO RODRÍGUEZ: *Finite element spectral analysis for the mixed formulation of the elasticity equations*
- 2012-07 ANA I. GARRALDA GUILLEM, GABRIEL N. GATICA, ANTONIO MARQUEZ, MANUEL RUIZ GALAN: *A posteriori error analysis of twofold saddle point variational formulations for nonlinear boundary value problems*
- 2012-08 LEONARDO E. FIGUEROA, ENDRE SÜLI: *Greedy approximation of high-dimensional Ornstein–Uhlenbeck operators*
- 2012-09 CLAUDIO PADRA, RODOLFO RODRÍGUEZ, MARIO SCHEBLE: *An hp finite element method to solve a fluid-solid vibration problem*
- 2012-10 JULIO ARACENA, LAURENCE CALZONE, JEAN - PAUL COMET, JACQUES DEMONGEOT, MARCELLE KAUFMAN, AURÉLIEN NALDI, ADRIEN RICHARD, EL HOSSINE SNOUSSI, DENIS THIEFFRY: *On circuit functionality in Boolean networks*
- 2012-11 JORGE CLARKE, CIPRIAN A. TUDOR: *Hitting times for the stochastic wave equation with fractional-colored noise*
- 2012-12 JULIO ARACENA, JACQUES DEMONGEOT, ERIC FANCHON, MARCO MONTALVA: *On the number of different dynamics in Boolean networks with deterministic update schedules*
- 2012-13 FELIX DIETZSCH, LUIS HERVELLA-NIETO, STEFFEN MARBURG, RODOLFO RODRÍGUEZ, HANNAH WEISBECKER: *Physical and spurious modes in mixed finite element formulation for the Galbrun equation*
- 2012-14 EMILIO CARIAGA, RUBÉN MARTÍNEZ, MAURICIO SEPÚLVEDA: *Estimation of hydraulic parameters under unsaturated flow conditions in heap leaching*

Para obtener copias de las Pre-Publicaciones, escribir o llamar a: DIRECTOR, CENTRO DE INVESTIGACIÓN EN INGENIERÍA MATEMÁTICA, UNIVERSIDAD DE CONCEPCIÓN, CASILLA 160-C, CONCEPCIÓN, CHILE, TEL.: 41-2661324, o bien, visitar la página web del centro: <http://www.ci2ma.udec.cl>



**CENTRO DE INVESTIGACIÓN EN  
INGENIERÍA MATEMÁTICA (CI<sup>2</sup>MA)  
Universidad de Concepción**



Casilla 160-C, Concepción, Chile  
Tel.: 56-41-2661324/2661554/2661316  
<http://www.ci2ma.udec.cl>

